




SG02/00262

SG02/55341

# Residential Silencers

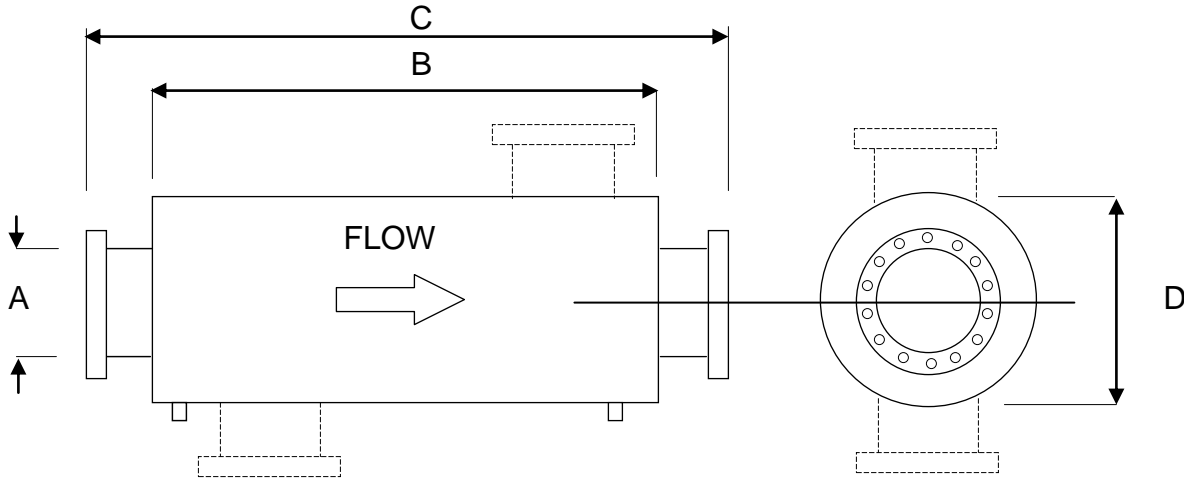

## SRE


(END INLET-END OUTLET)

## SRS

(SIDE INLET-END OUTLET)

ØA	B	C	ØD
75	1070	1240	350
100	1140	1315	400
125	1400	1575	450
150	1525	1705	550
200	1830	2040	660
250	2340	2555	760
300	2740	2955	915
350	3300	3560	1020
400	3860	4035	1170

\* Larger sizes available on request

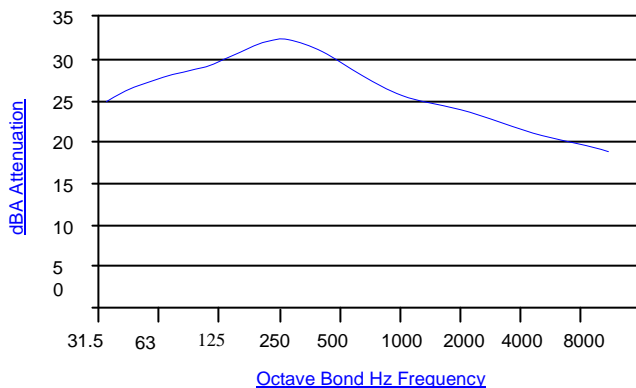

## APPLICATION

Residential series is a high performance reactive silencer recommended for those conditions where the ambient noise level in the environment is very low, particularly where stringent noise criterion is demanded and offers excellent broadband attenuation. For use with two and four cycle engines.

## PERFORMANCE

An attenuation of up to 30dBa is attained from the outlet of SRE range of silencers under open-field conditions.

## FEATURES

- Mild steel body with JIS 5K flanges
- Coated with heat-resistant aluminum paint (Up to 600°C)
- Can be mounted either vertically or horizontally without affecting performance
- Modifications and other sizes available upon request



## EXHAUST CONTROL INDUSTRIES (S) PTE LTD

69 TECH PARK CRESCENT, SINGAPORE 638073.

TEL NO : 67442689 FAX NO : 67472217 E-MAIL : enquires@eci.com.sg WEBSITE : [www.eci.com.sg](http://www.eci.com.sg)

\* ECI is protected by local and international trademark legislations. Patent Pending.