




SG02/00262.01

SG02/55341.01

CE25SA75 DNVGL-CP-0282-Type Approved Spark Arresting Silencers (Up to 25dba Attenuation)

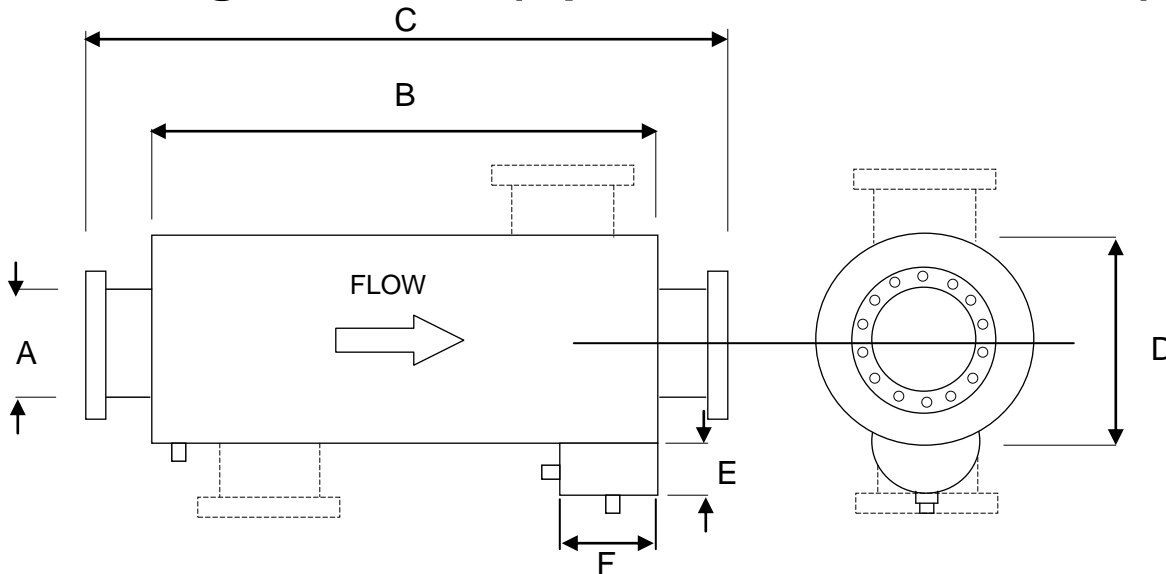

CE25SA75


(END INLET-END OUTLET)

CE25SA75S

(SIDE INLET-END OUTLET)

ØA	B	C	ØD	RAD E	F
75	550	700	310	70	180
100	700	850	360	80	230
125	880	1030	410	80	250
150	1100	1250	460	80	300
200	1300	1500	560	80	350
250	1480	1680	660	90	430
300	1630	1830	760	90	460
350	1850	2100	920	90	530
400	2060	2310	1050	100	600

* Larger sizes available on request

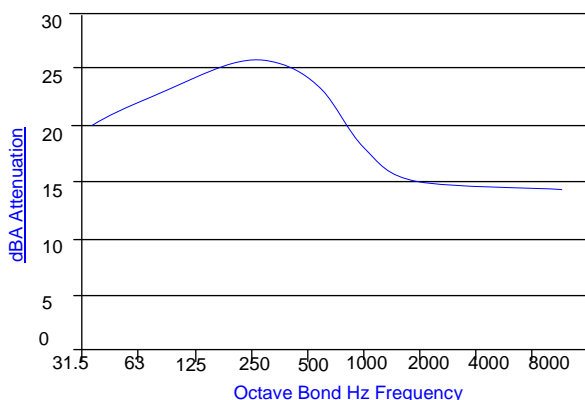

APPLICATION

CE25SA75 Spark Arresting series is a mid performance reactive silencer recommended for those conditions where the ambient noise level in the environment is low and type approval is compulsory. It also offers excellent cross frequency attenuation. For use with two and four cycle engines.

PERFORMANCE

Attenuation of up to 25dba is attained from the outlet of CE25SA75 / CE25SA75S range of silencers under open-field conditions.

FEATURES

- Mild steel body with choice of flanges (JIS, ANSI, PN10, Table D, etc.)
- Coated with heat-resistant aluminum paint (Up to 600°C) Sandblasting Optional
- Can be mounted either vertically or horizontally without affecting performance
- Choice of materials of construction (MS, SS304, SS316, etc.)
- Modifications and other sizes available upon request

CORD EXHAUST ENGINEERING PTE LTD

69 TECH PARK CRESCENT, SINGAPORE 638073.

TEL NO : 67442689 FAX NO : 67472217 E-MAIL : enquires@cordexhaust.com.sg WEBSITE : www.cordexhaust.com.sg